


# AED9201B

Basic device for  
AD103C

AED9201B  
Basic device




AD103C  
Amplifier board

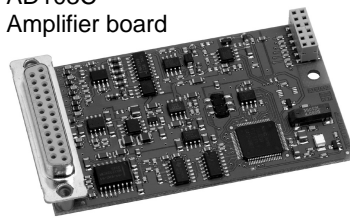

## Special features

- RS-232 or RS-485 interfaces
- Two control inputs and four limit value outputs
- Six control inputs / outputs (Dosing function)
- Test report for 10 000 digits class III available
- 18...30 V Supply voltage range
- Degree of protection IP65
- EMC protection
- Diagnostics bus for analyzing and additional indication

Dimensions (in mm; 1 mm= 0.03937 inches)

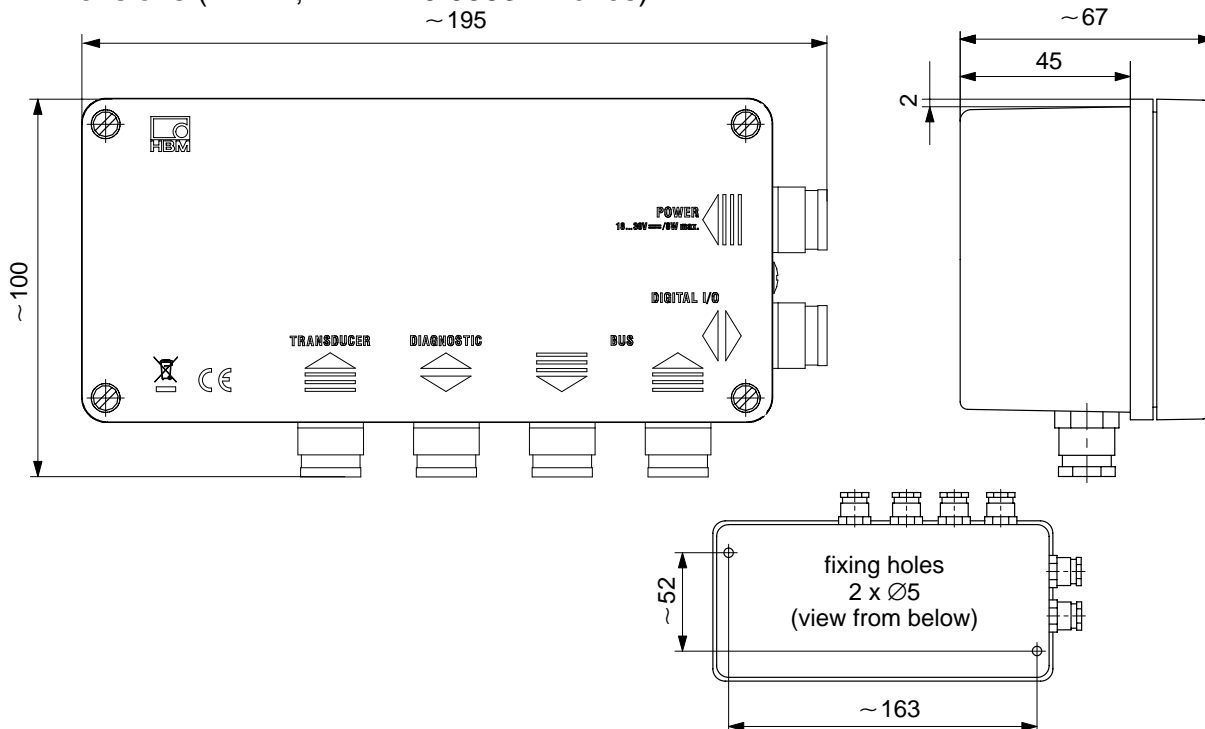

## Specifications

Type		AED9201B
Measuring amplifier		AD103C
Measuring signal input	mV/V	±3, nominal ±2
<b>Transducer connection:</b>		
Strain gage transducer (full bridge)	Ω	≥80...4000
Transducer connection		6-wire circuit
Transducer cable length	m	≤100
Bridge excitation voltage	V <sub>DC</sub>	5
<b>Interfaces:</b>		
Hardware (selectable via slide switch)		RS-232, RS-485 (4 wire)
Interface cable length RS-232	m	≤15
RS-485	m	≤1000
Max. number of bus members		90
<b>Control inputs (electrically isolated):</b>		
Number		2
Input voltage range, LOW	V	0...5
Input voltage range, HIGH	V	10...30
Input current, typ., HIGH-level = 24 V	mA	typ. 12
Insulation voltage, typ.	V <sub>DC</sub>	500
<b>Control outputs <sup>1)</sup> (electrically isolated):</b>		
Number		Supply from supply voltage 4
Output current at LOW level (I <sub>OUT</sub> )	mA	<2
Output voltage HIGH level (U <sub>OUT</sub> )	V	>15 at I <sub>max</sub>
Output current, max. (I <sub>OUTmax</sub> )	mA	< 500, per output
Insulation voltage, typ.	V <sub>DC</sub>	500
<b>Diagnostics bus:</b>		
Protocol		ASCII/Binary
Baud rate, max.	kbit/s	38.4
Node address		0 ... 89
Length of Interface cable, max.	m	1000
<b>Supply:</b>		
Supply voltage (DC), nominal	V	18...30
Supply voltage (DC), minimal	V	15
Current consumption (without load cell and Output current)	mA	≤175 <sup>2)</sup>
<b>Temperature range:</b>		
Nominal temperature	°C [°F]	-10...+40 [+14...+104]
Operating temperature		-20...+60 [-4...+140]
Storage temperature		-25...+85 [-13...+185]
<b>Dimensions</b>	mm	195 x 100 x 70
<b>Weight, approx.</b>	g	925 (without AD10x)
<b>Degree of protection according to EN 60529 (IEC 529)</b>		IP65

1) Depending on the external supply voltage

$$2) \text{ Current consumption} = \leq 175 \text{ mA} + \frac{\text{Supply voltage } U_B = 5 \text{ V}}{\text{Bridge resistance } R_B} + \sum I_{\text{out } 1...6}$$

## Order designations

1-AED9201B = Basic device AED9201B

1-AD103C = Amplifier PCB with dosing function AD103C (see separate Data Sheet)

## Accessories, to be ordered separately

Legal-for-trade digital scale display (see separate Data Sheet)

1-DWS2103

## Documentation

1-FIT-AED-DOC = (CD-ROM with operating manual and AED\_Panel32 panel program)

© Hottinger Baldwin Messtechnik GmbH.

Modifications reserved. All details describe our products in general form only. They are not to be understood as express warranty and do not constitute any liability whatsoever.

## Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45 · 64293 Darmstadt · Germany  
 Tel. +49 6151 803-0 · Fax: +49 6151 803-9100  
 Email: info@hbm.com · www.hbm.com



measure and predict with confidence